


E1 000 Opening Window & Door System



Used for the construction of opening doors and windows. The profiles are non-insulated. There is a variety of profiles with blunt and curved corners and also dedicated profiles for corner construction. Linear exterior surface without visible joints.

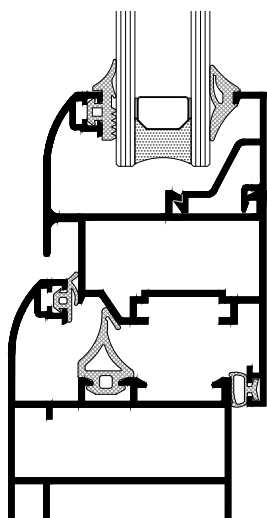

Technical features

Frame depth: 40 mm
Vent depth: 47.5 mm
Facing width (vent + frame): 93.5 mm
Single & double glazing option
Glazing infill range: 4 ÷ 20 mm
Max. vent width: 1400 x 1700 mm
Max. vent height: 950 x 2200 mm
Three level sealing by gaskets made of EPDM

Performances

Air permeability:	up to Class 4
Watertightness:	up to Class 9A
Resistance to wind load:	up to Class C4
Acoustic performance:	up to 38 dB

Hardware



Standard Eurogroove and PVC groove
Max. leaf weight: 100 kg

Surface treatment options

RAL colours
ETEM colours
Anodising
Wood effects
Quality Standards:
- QUALICOAT
- QUALANOD
- QUALIDECO

Typologies

- Turn, tilt & turn
- Tilt, projecting, folding, fixed, parallel sliding, door
- Inwards & outwards opening
- Single & double leaf

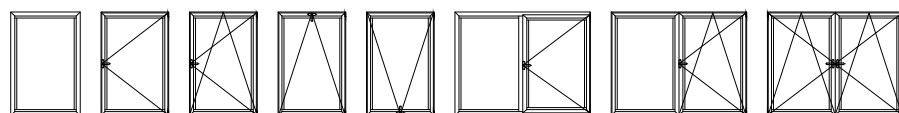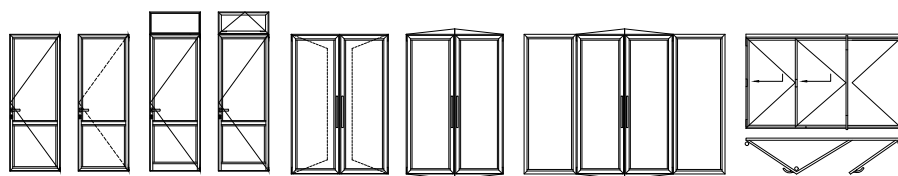

Production certificates

- EN ISO 9001
- EN ISO 14001
- OHSAS 18001

