


HORIZONTAL MOVING SHADING BLINDS



recycle code:
14987

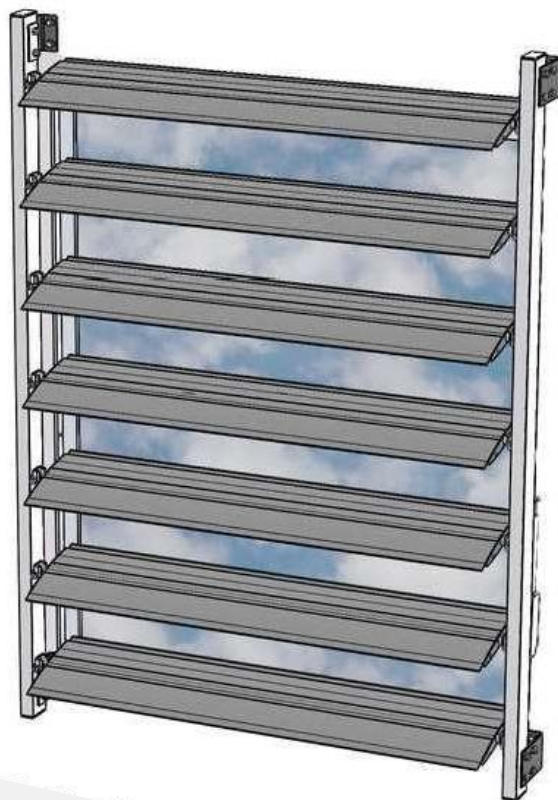

GENERAL CHARACTERISTICS


This system is engineered to provide **sunlight protection for building facades**. It is particularly well-suited for glass curtains or other openings, such as large windows. By adjusting the blinds, natural lighting can be efficiently controlled, including complete blackout.

Their installation can be facilitated by anchoring to a wall or other suitable metal structures, with a direct modification of the support base, as the blinds are predicated on mounted nylon bearings. The installation of the blinds is both **swift and straightforward**.

i The blinds (300 x 30mm) can function within a range of -5° to 45°, with 0° representing the horizontal position.

RAL COLORS

AT NO ADDITIONAL COST

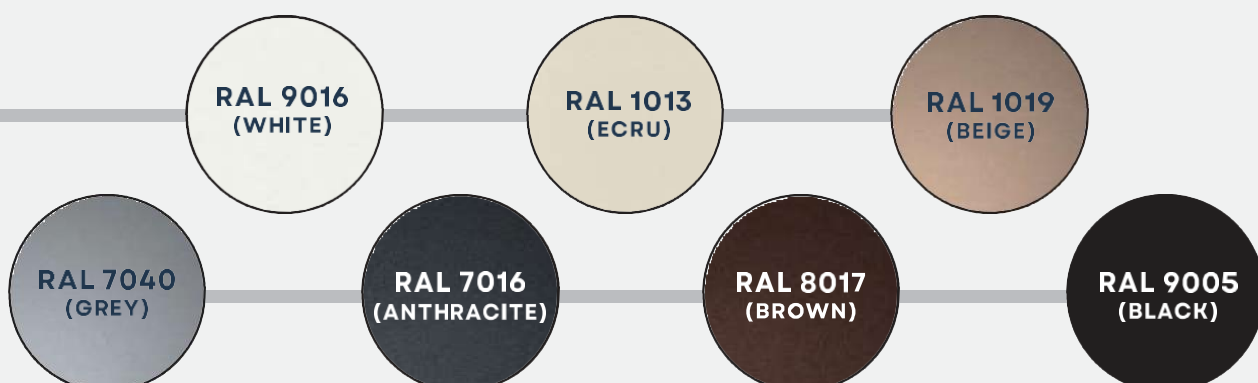


ELECTRICAL OPERATION



The system is powered by a **Somfy** rock piston motor, which is positioned between the blinds and the wall to ensure it remains hidden.

Operation is facilitated with a switch.

MANUAL OPERATION

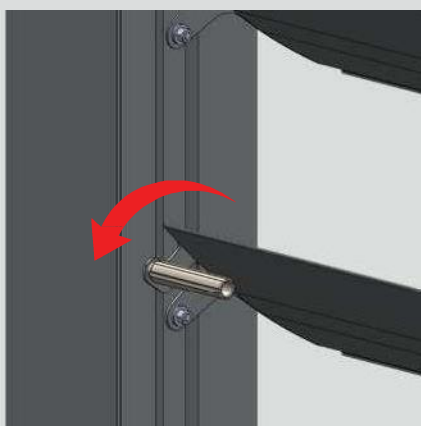

If access to the system is available from inside the building, it can be operated manually with remarkable ease using only a handle.

PERGOLA SIDE COVER




The system can serve as an exceptional side cover for any type of pergola.

This solution allows effective management of both sunlight and wind.



TECHNICAL SPECIFICATIONS

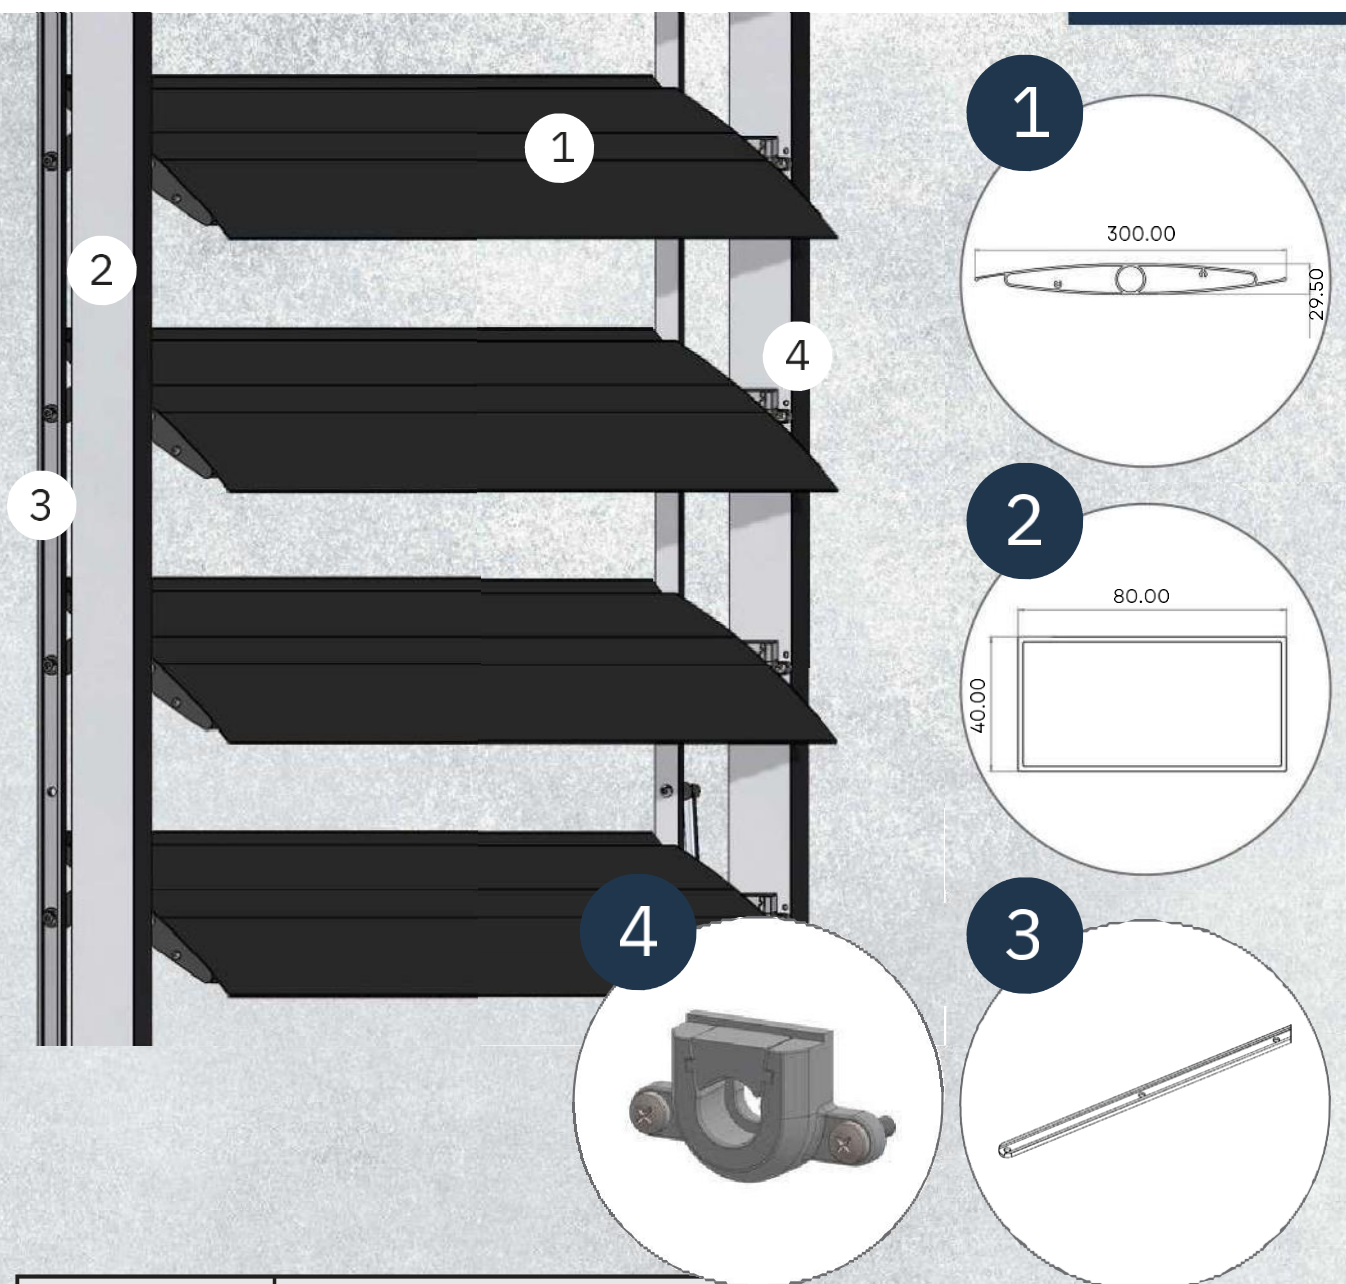

NUMBER OF BLINDS	SYSTEM HEIGHT	
	FROM	UP TO
4 blinds	1116mm	1182 mm
5 blinds	1388mm	1476 mm
6 blinds	1660mm	1770 mm
7 blinds	1932mm	2064 mm
8 blinds	2204mm	2358 mm
9 blinds	2476mm	2652 mm
10 blinds	2748mm	2946 mm